


# LOW VOC BINDER

## RSB-501LV



**new**

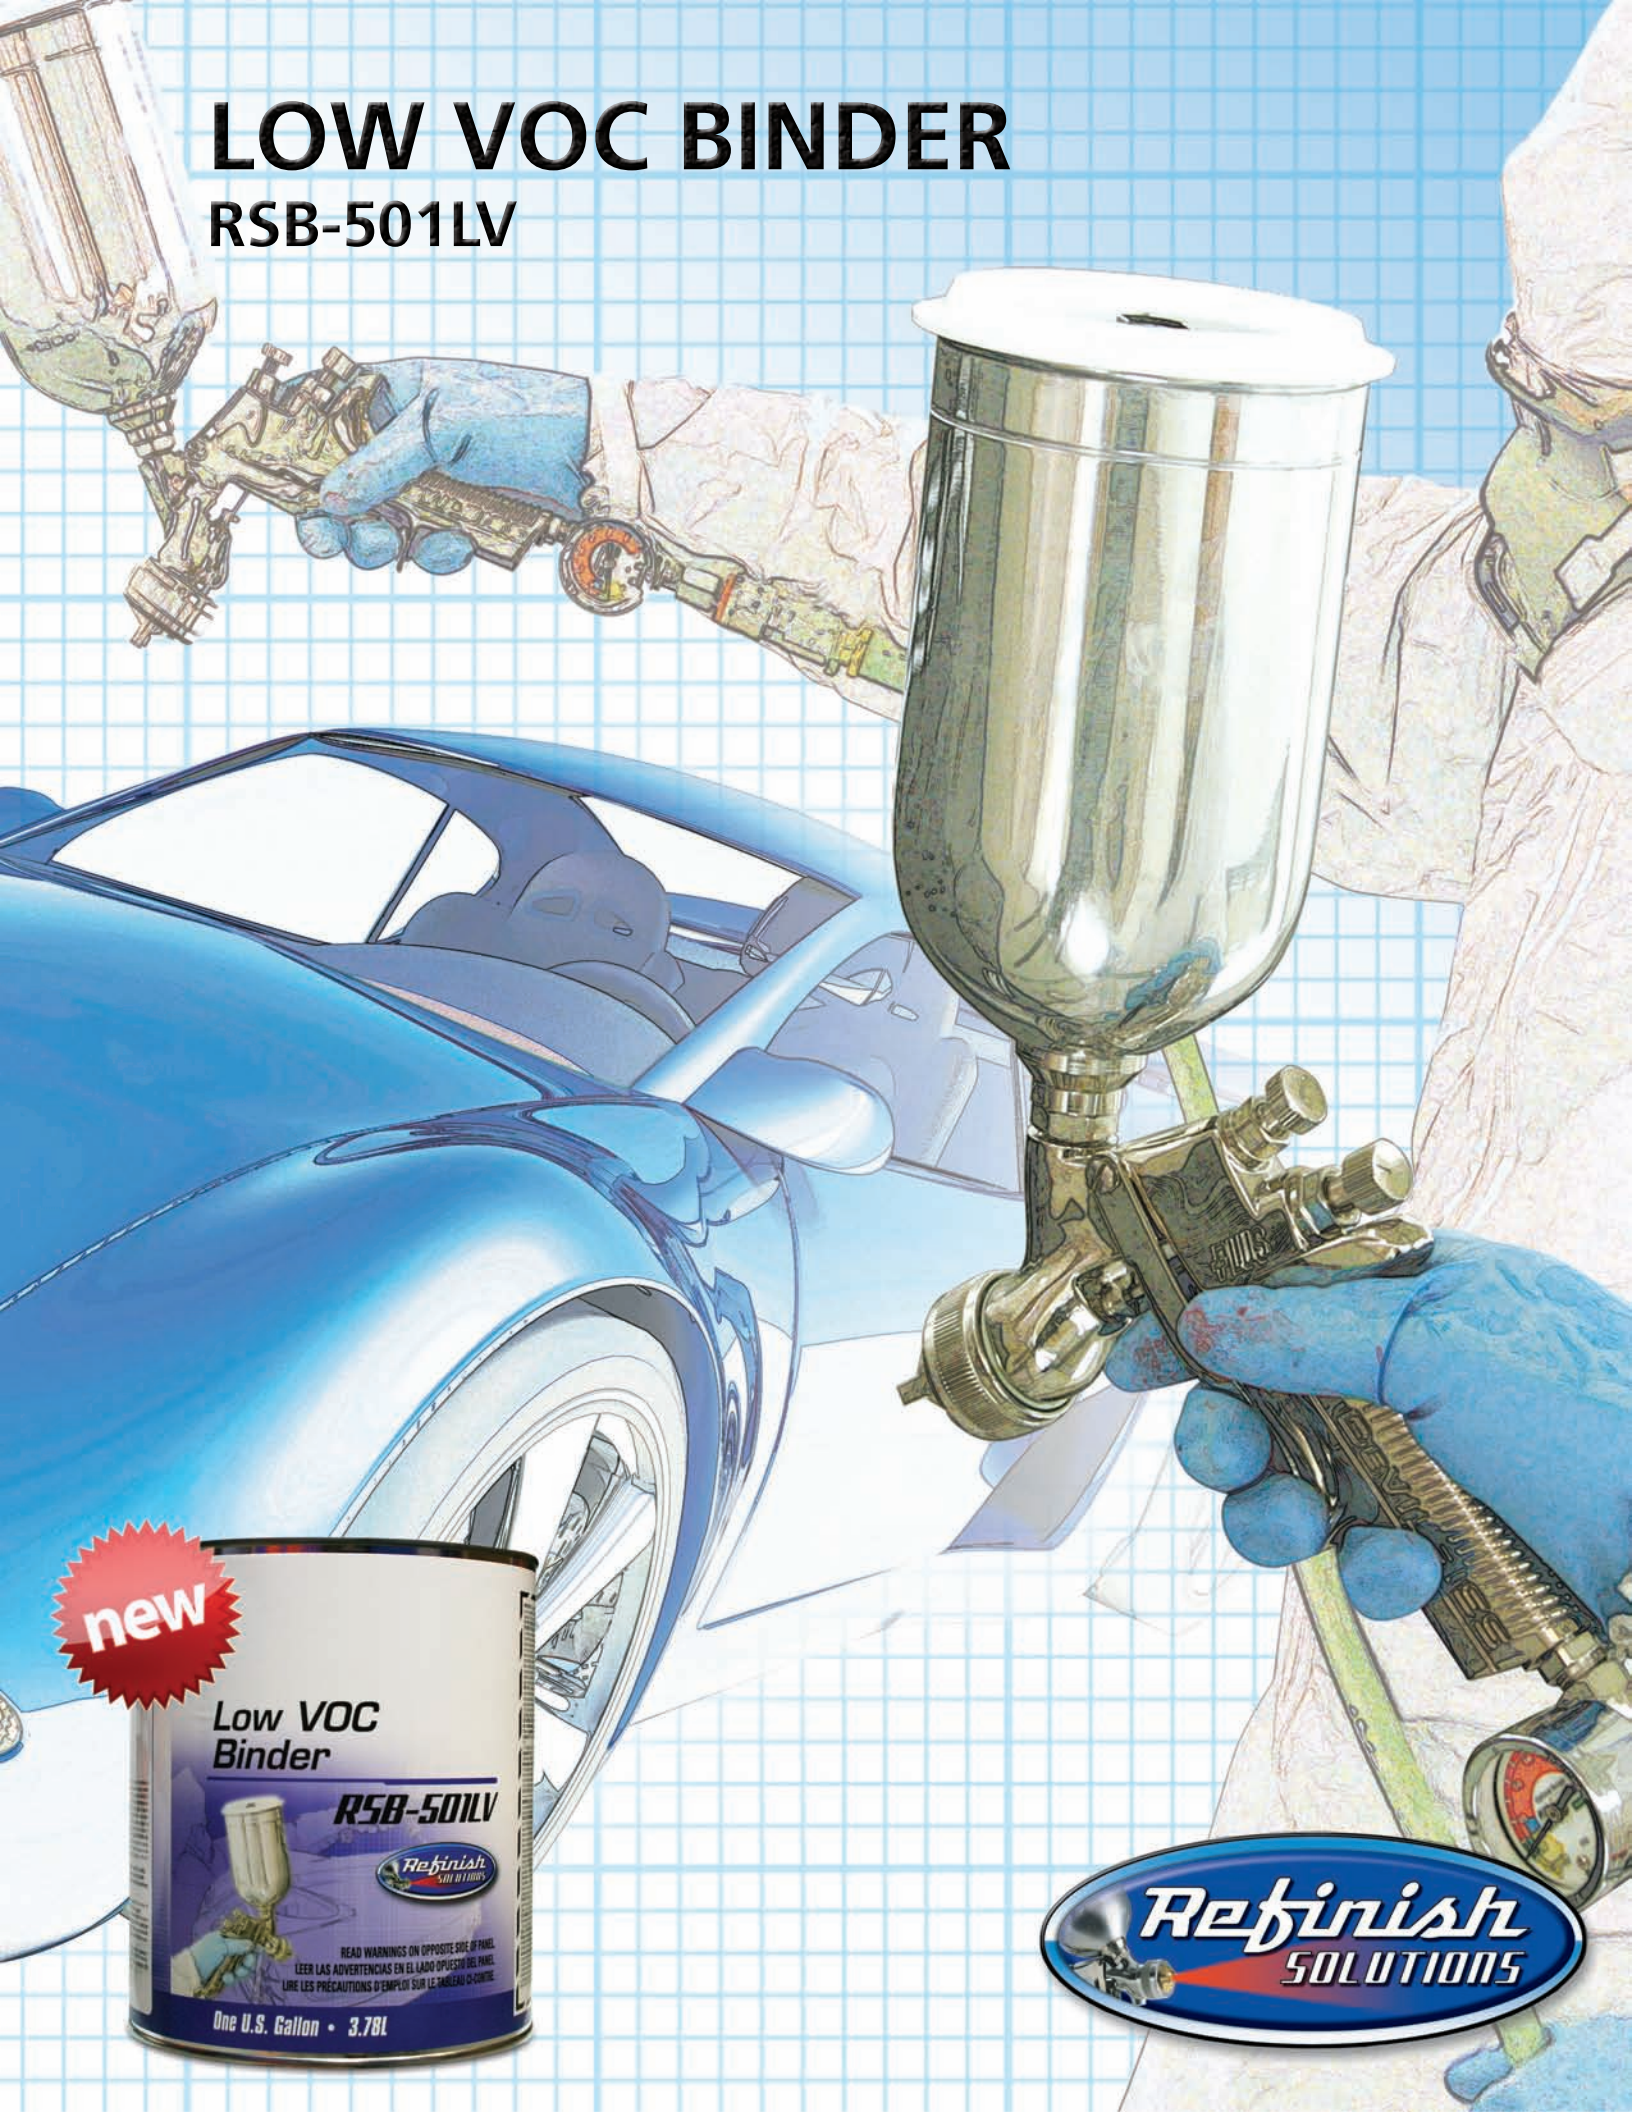

# LOW VOC BINDER

## RSB-501LV



### DESCRIPTION:

**RSB-501LV BINDER** is designed to reduce the VOCs of the Refinish Solutions Basecoat System to help users achieve 3.5 VOC or lower. The RSB-LV system was formulated to reproduce the color and appearance of the OEM coating applied to your vehicle at the factory. This basecoat may be used for spot, panel, or overall repairs.

### PRODUCTS:

RSB-LV                    Low VOC Refinish Solutions Basecoat  
RSB-501LV              Low VOC Binder

### Reducers:

RSR-010LV            Extra Slow Zero VOC Universal Reducer  
RSR-025LV            Fast Zero VOC Universal Reducer  
RSR-050LV            Medium Zero VOC Universal Reducer  
RSR-075LV            Slow Zero VOC Universal Reducer

### APPLICATION:

Apply 2-3 medium wet coats or until hiding is achieved at 35-45 psi or (8-10 psi when using HVLP at the aircap) allowing a 10-15 minute flash between coats. Allow the final coat of RSB-LV to dry 15-30 minutes at 77° F before applying clearcoat.

### MIXING RATIO:

<u>RSB-LV</u>	<u>RSR-Series Zero VOC Reducers</u>
2 Parts	1 Part

**Note: To maintain VOC compliance, the amount of RSB-501LV will vary with each formula. Coverage and flash times may be affected. Sprayouts are required to determine these characteristics with each individual color.**

### TECHNICAL DATA:

Mix Ratio:	2 parts using RSB-LV 1 part using RSB-501LV
Viscosity (RTS):	15 - 18 seconds #2 Zahn
Film Build per coat:	0.4 - 0.6 mils
Coverage:	190 - 275 sq. ft.
Pot Life:	None, mix thoroughly
VOC (RTS):	3.5 lbs/gal or less
Dust Free:	10 minutes
Tack Free:	15 minutes
Tape Time:	35-45 minutes
Disposal/Safety:	See MSDS for this product



**Simple, Easy, Affordable**